

TEC-22

MANUAL (ALL MODELS)



**WARNING: READ MANUAL BEFORE
USING THIS FIREARM**

 **INTRATEC**
FIREARMS

WARNING

There are no excuses for unsafe handling of firearms, only regrets.

Never accept or pick up a firearm without removing the magazine, checking the chamber to assure it is empty, and placing the weapon on safe.

Always make sure the muzzle is pointed in a safe direction at all times.

Never store firearms and ammunition together; keep them locked and away from children or any incapacitated persons.

Never keep a loaded firearm in the home, car, boat or R.V.

Never attempt climbing obstacles with a loaded firearm.

Never touch trigger when working the operating handle.

Never tamper with magazine.

Never alter components in your firearm.

Do not take medications, drugs or alcohol when handling firearms.

Never use old ammunition, use only recommended ammunition.

Point the muzzle in a safe direction when loading or unloading your firearm.

Never load a firearm except immediately before shooting.

Never handle firearms without proper shooting glasses and ear protection.

Never place finger on trigger until ready to fire.

Never place hand near the muzzle at any time.

Never point a firearm at anything you do not intend to shoot.

When firing, make sure your "audience" is always 5 feet in back of you and wearing proper ear and eye protection.

Never shoot at water or any other surface where a ricochet can occur.

Never shoot until you are sure of your backstop and what lies beyond it.

If the gun does not discharge after pulling trigger, do not change its down range position for at least 30 seconds, you could be experiencing a "hang fire".


All malfunctions must be reported immediately and the use of the firearm discontinued until the problem is corrected by the manufacturer.

If you do not understand how to operate any of our products or have any questions about their safe handling, please write to us.

INTRODUCTION

Congratulations:

You have just purchased a very unique firearm of which you can be extremely proud. The **TEC-22** was designed and manufactured in the United States. Extensive research and computer assisted development has been incorporated into this model. Thanks to the advanced design and modern high speed manufacturing techniques, we can assume low cost, without compromising quality in materials and workmanship.

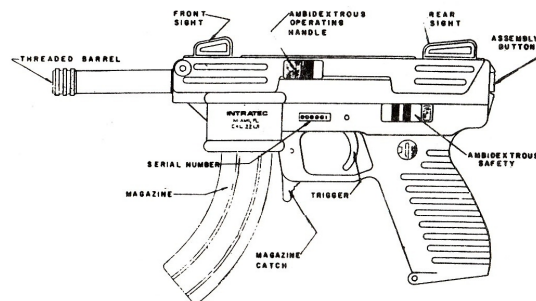

DESCRIPTION

The **TEC-22** is a semi-automatic pistol which operates by elementary blowback. The sights are adjustable for windage and elevation. The slide type safety blocks the trigger and hammer preventing it from hitting the firing pin and striking the rim of the cartridge. The

TEC-22 is made of steel and reinforced nylon components.

TECHNICAL SPECIFICATIONS:

Ammunition



Standard



Truncated

.22 LR High-velocity (only)

NOTICE: Intratec magazines are made to function with Standard, High Velocity, Long Rifle Cartridges. Ammo with truncated heads, those with a sharp angle in the nose, can jam. Examples of truncated ammo include Remington "New" Thunderbolt, Remington Viper, Yellowjackets, and any brand of Hollow Point Winchester. Also, hollow point ammo in general can cause malfunctions.

Weight unloaded

29 oz.

Overall length

11³/₁₆"

Barrel length

4"

Sight radius

6¹/₂"

Front sight

Fully adjustable for windage

Rear sight

Fully adjustable for elevation

Max. width

1⁵/₈"

Height

6³/₁₆"

Safety

Ambidextrous slide

Operation

Blow-back semi-automatic

Mag. capacity (std.)

30 rds.

Muzzle velocity


1000 f.p.s.

INSTRUCTIONS FOR USE

Before proceeding to use this weapon a word of caution is in order. The pistol is as safe to handle and use as we can make it, but there is no foolproof firearm. **Be sure that the muzzle is pointing in a safe direction at all times, whether the gun is loaded or not.** Make safe gun handling a habit. **Do not attempt to load and fire this weapon until you are thoroughly familiar with all its safety features and fully understand the operation of this firearm.**

SAFETY

Ambidextrous safety is engaged by sliding safety rearward until letter "S" is clearly showing (see diagram below). This action blocks the trigger from releasing the hammer. NOTE: Safety will not engage if hammer is not in a cocked position. Remember, all mechanical safeties can fail.

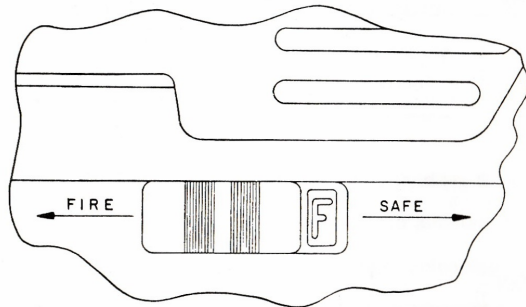

BEFORE LOADING

Be sure barrel & chamber are clean and free of grease or obstructions.

LOADING YOUR TEC-22

With the pistol pointing in a safe direction and your fingers away from trigger area, insert loaded magazine into magazine well. Pull ambidextrous operating handle all the way back, engaging the hammer, then simply release the handle. Your **TEC-22** is now ready to fire.

Keep finger away from trigger until ready to shoot.

SIGHT ADJUSTMENTS

Attention: Make sure pistol is empty and in safe condition before commencing adjustments.

Rear sight can be adjusted for elevation by turning screw in direction you want for point of impact.

Front sight can be adjusted for windage by first loosening screw in the bottom of the cover then moving front sight in opposite direction you want for point of impact. Re-tighten screw on bottom of cover.

WARNING

FIREARMS ARE MECHANICAL EQUIPMENT. YOUR LIFE, AND ALL OTHERS AROUND YOU, DEPEND ON HOW SAFELY YOU OPERATE THEM.


RETURN TO:

PHONE: () _____

PLACE
STAMP
HERE



12405 S.W. 130th St.
Miami, FL 33186-6224



Please send me the following items and quantities checked below.

TEC-22 ACCESSORIES

✓	Quantity	Order No.	Description	Price
		300360	TEC-30 30 Round "Jungle Clip" Magazine	23.95
		300380	TEC-22BE Barrel Extension, Gun Blue	28.95
		300382	TEC-22PC Protective Hard Case	13.95
		300383	TEC-22SB Scope Base, Weaver Top	9.95
		300385	TEC-22RC Recoil Compensator, Gun Blue	21.95
		300386	TEC-22TB Threaded Barrel (only), Gun Blue	39.95
		300395	TEC-22SSS Sling Swivel Set	12.95
		300397	TEC-22DC Deluxe Cordura Case	43.95
		300398	TEC-22PK Accessory Pack, Gun Blue	128.95
		300480	TEC-22KBE Barrel Extension, Tec-Kote	32.95
		300483	TEC-22KSB Scope Base, Tec-Kote	12.50
		300485	TEC-22KRC Recoil Compensator, Tec-Kote	26.50
		300486	TEC-22KTB Threaded Barrel, Tec-Kote	33.95
		300498	TEC-22KPK Accessory Pack, Tec-Kote	147.95
			SUBTOTAL	
			FL. RES. (6% SLS. TAX)	
			TOTAL	

PLEASE NOTE:
NO PERSONAL CHECKS WILL
BE ACCEPTED.

ALL PRICES ARE SUBJECT
TO CHANGE WITHOUT NOTICE.

NO REFUNDS

NO RETURNS

WE CANNOT SHIP TO
P.O. BOX NUMBERS

No freight charges if shipped
in the Continental U.S.A.

FOR MORE DETAILED INFORMATION
PLEASE REFER TO OUR CATALOG.

HOW TO ORDER ACCESSORIES

Complete the order form below. Mail to INTRATEC with Money Order or Cashier's Check.

Please Note: If order form is received with Money Order; shipping is prepaid by INTRATEC.

ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TEAR HERE

IMPORTANT
Failure to return this Warranty Card within 7 days, will void your warranty.
This **TEC-22** is warranted against defects and workmanship for 1 yr. to the initial purchaser only. During the warranty period, Intratec will repair or, at its option, replace at no charge components that may prove to be defective provided the gun is returned, shipping prepaid, to INTRATEC. This warranty does not apply if your **TEC-22** is damaged by accident or misuse, or after any service or modification by other than INTRATEC. INTRATEC shall not be liable for consequential damages. NO OTHER WARRANTY, EXPRESSED OR IMPLIED, IS PROVIDED.

SERIAL NO.	MODEL NO.	This portion is for your records	Purchase Date	PURCHASED AT
TEC-22	TEC-22	TEAR HERE		

WARRANTY INFORMATION CARD

SERIAL NO.	MODEL NO.	PURCHASE DATE
TEC-22	TEC-22	

OWNER'S NAME & ADDRESS (PLEASE PRINT) DEALER'S NAME & ADDRESS (PLEASE PRINT)

NAME NAME

STREET STREET

CITY STATE CITY STATE ZIP ZIP

PHONE () PHONE ()

I attest that prior to operating the **TEC-22**, I have read, fully understand, and agree to abide by all recommendations and safety instructions contained in this owners manual.

TEAR HERE

WARRANTY NOT VALID WITHOUT
SIGNATURE AND DATE.

SIGNATURE DATE

DISASSEMBLY

With the gun in unloaded condition, press disassembly button, lift cover, and remove the bolt upward complete with latch button. Additional disassembly is not recommended for normal cleaning and inspection.

ASSEMBLY

The above process in reverse order.

MALFUNCTIONING

Stoppages in the **TEC-22** are almost invariably caused by the ammunition or its' maintenance condition. Irregular or very short ejection indicates underpowered cartridges. You should also avoid unnecessary dry fire, which causes the bolt chamber, and or the firing pin, to be damaged.

General Rule: Point gun in safe direction

Remove the magazine

Remove misfired or jammed cartridge

If any of the above problems are not solved by cleaning, immediately discontinue the use of the firearm and contact INTRATEC to report malfunction and return for service.

WARRANTY

Failure to return the enclosed warranty card within 7 days will void the warranty on this product. This **TEC-22** is warranted against defects in materials and workmanship to the initial purchaser only. During the warranty period, INTRATEC will repair or, at its option, replace at no charge components that prove to be defective, provided the gun is returned, shipping prepaid, to INTRATEC.

This warranty does not apply if your **TEC-22** has been damaged by accident or misuse, or after any service or modification by other than INTRATEC. INTRATEC shall not be liable for consequential damages. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS PROVIDED.

SERVICE

Should your **TEC-22** require adjustment, repair, or refinishing, we sincerely recommend that the weapon be returned, unloaded, to the factory. There is no other way to insure that the work will be done in a properly equipped and staffed shop. All returns must include the following information: Full Name, Street Address, City, State, Zip Code and Phone Number.

NO GUN WILL BE ACCEPTED FOR REPAIR IF NOT COMPLETE OR IF RECEIVED LOADED.

CARE AND CLEANING

To ensure proper functioning, your **TEC-22** should be disassembled and cleaned at reasonably frequent intervals, preferably always after shooting.

Use any good commercial solvent, and after cleaning, lubricate sparingly with a light weight gun oil. Outside surfaces may be protected from corrosion by coating lightly with rust inhibiting oil or grease. Be careful not to drop magazines, as they may be sufficiently deformed to cause malfunctions. Always keep ammunition away from gun during cleaning.

WARNING

FIREARMS ARE MECHANICAL EQUIPMENT. YOUR LIFE, AND ALL OTHERS AROUND YOU, DEPEND ON HOW SAFELY YOU OPERATE THEM.

RETURN TO:




PHONE: ()

PLACE
STAMP
HERE



12405 S.W. 130th St.
Miami, FL 33186-6224



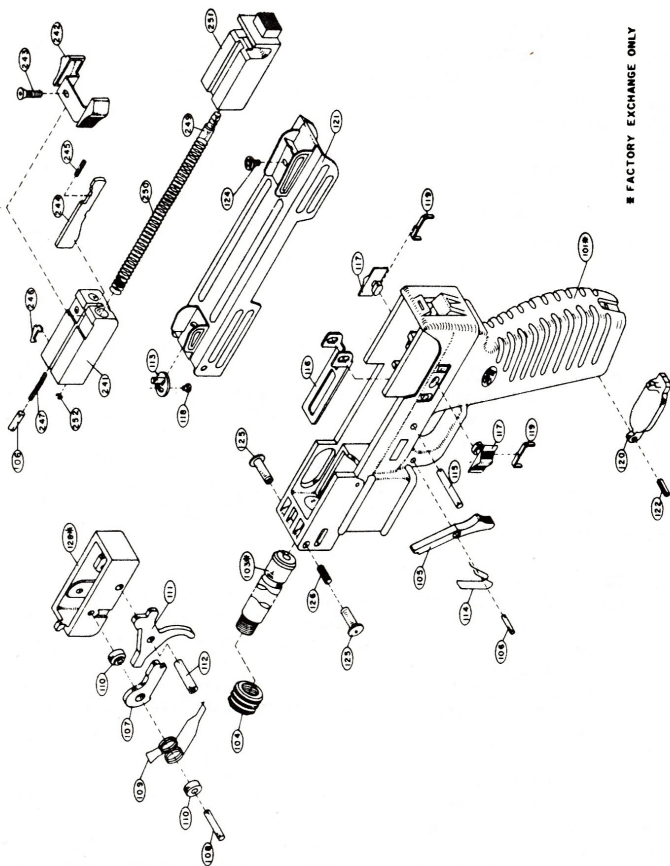

FACTORY EXCHANGE ONLY

TEC-22

TEC-22 PARTS LIST

* 300101 Frame	300122 Butt pin
300103 Barrel	300124 Rear sight elevation Screw
300104 Thread cover	300125 Cover axis
300105 Magazine catch	300126 Cover axis screw
300106 Magazine catch axis and extractor pin	* 300128 Insert
* 300107 Hammer	* 300241 Bolt
300108 Hammer axis	300242 Operating handle
300109 Main spring	300243 Operating handle screw
300110 Hammer bushing	300244 Firing pin
* 300111 Trigger	300245 Firing pin spring
300112 Trigger bushing	300246 Extractor
300113 Front sight	300247 Extractor spring
300114 Magazine catch spring	300249 Recoil spring guide (sub assembly with latch button)
300115 Insert pin	300250 Recoil spring
300116 Safety	300251 Latch button
300117 Safety button	300252 E-ring
300118 Front sight screw	300281 Manual
300119 Safety spring	300360 Magazine 30 rnd.
300121 Cover	
300120 Butt	

* Factory installed only.

Gun must be sent to Intratec for exchange of these items.

Note: When requesting parts for Tec-22 "Tec-Kote" please specify if parts to be ordered are Tec-Kote finish.

**WHEN ORDERING PARTS PLEASE USE
PART NUMBERS AND FULL DESCRIPTION**

WARNING:

Improperly fitted part may cause dangerous malfunction, damage to the firearm or personal injury to the shooter. It is the purchaser's responsibility to have all replacement parts correctly fitted and installed.

Care has been taken in the preparation of this manual, however, INTRATEC is not responsible for typographical errors and omissions contained herein.



12405 S.W. 130th St.
Miami, FL 33186-6224